

Telephone Relays



Weatherproof AC/DC
CRT-T-40

Order Code
0049

Explosion Proof AC/DC
XRT-T-40

0221


	Input Voltage	AC Contact Ratings		DC Contact Ratings	REN
		115 volts	230 volts	115 volts	
CRT-T-40	39-150 V, 20-30 Hz	5	230	500mA	0.6
XRT-T-40	39-150 V, 20-30 Hz	Amps	Amps		

Wheelock telephone relays activate various appliances when a telephone ring voltage is detected. Two models are available to accommodate different voltage requirements, environments and applications.

Available features and options:

- Indoor, outdoor
- Explosion proof - (XRT-T-40)
- UL Listed, FCC registered
- Accepts RJ-11 phone plug
- AC/DC Relay

Series CRT

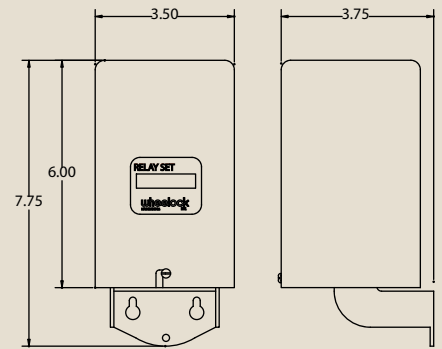

Series XRT

